


Submersible Level Transmitters For Clean and Dirty Liquids Series: PT-500

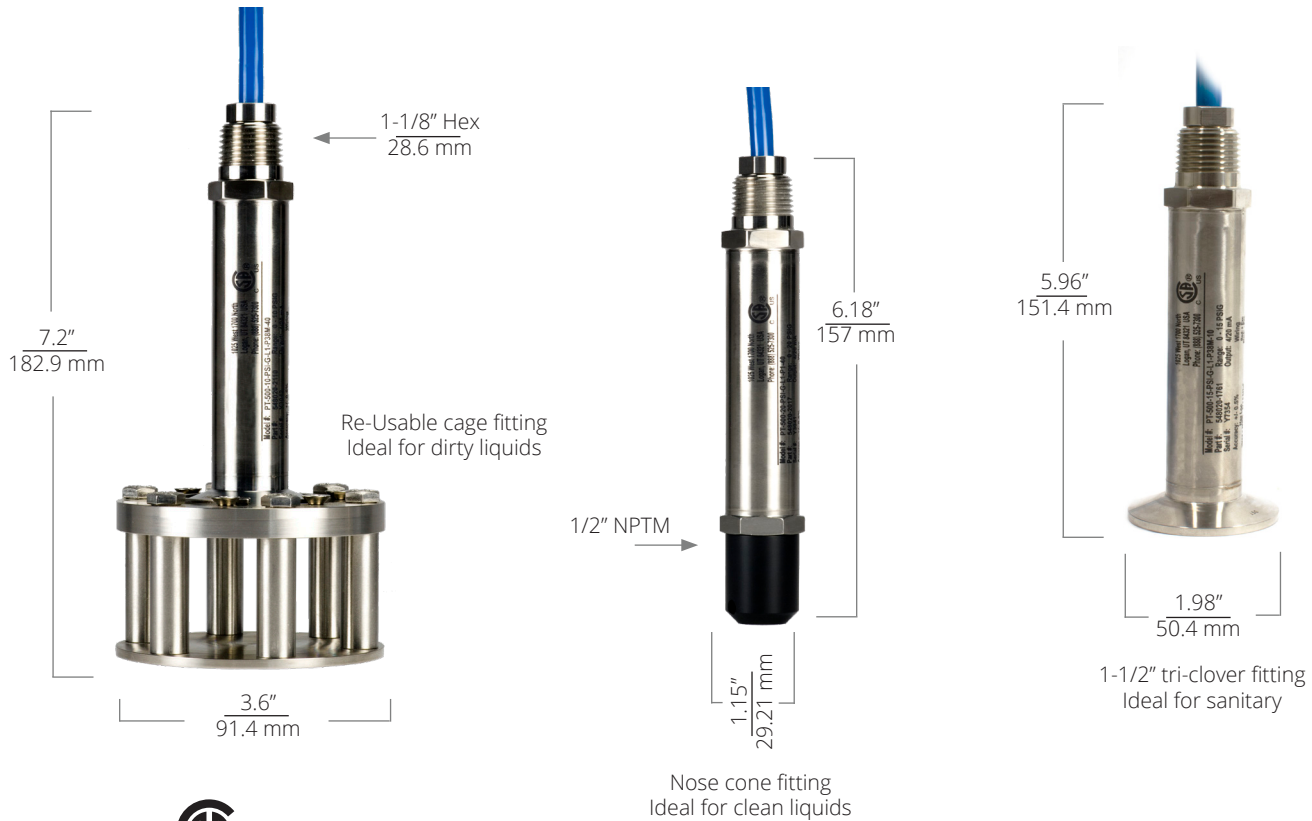

The PT-500 is a rugged submersible pressure transmitter designed for tank liquid level measurement, water and wastewater applications, and well depth measurement.

Features

- Simple to install
- High precision, solid state signal: 4-20 mA
- Exclusive, removable and reusable cage
- 1/2" NPTM option on cable end for use with conduit
- Durable transducer face
- Intrinsically safe for Class I, Div 1/Zone 0 (4-20mA only)
- Built-in lightning protection on every model
- Single seal for highest safety protection factor

The Only One In Its Class

Built-In Lightning Protection

Lightning strikes are always a threat to exposed electrical infrastructure - especially when it's 40 feet underground.

That's why we've included built-in lightning protection as a standard feature for every model (including intrinsically safe version).

So forget about buying a \$300 industrial surge protector. It's included.

Class 1, Division 1/Zone 0

The PT-500 is built to handle tough applications - including hazardous locations. It's intrinsically safe design means it's suitable for even the most explosive environments.

Field Adjustable Zero

Even the best submersible pressure transducers drift a little over time. Ours stands apart from the others because you can adjust the zero point in the field - bringing it back within spec.

All it takes is a simple magnet (included). It's easy to do and means you won't need to have it recalibrated as often.

Re-Usable Cage

Need to protect your sensor? The cage is the ideal solution. But it costs extra no matter who you buy from. Ours can be removed and reused when it's finally time to replace your sensor - saving you money.

Tight budgets can be challenging. Why not save as much of it as you can.

Low Power Consumption

The Modbus and voltage output versions use very little power and have a very fast response time - ideal for battery-powered installations.



Impressively Thoughtful Design

At the end of the day, the PT-500 submersible pressure transducer is modeled after your needs. An accurate, robust sensor was the priority, then we simply thought of you and took it a few steps further!


Visit our website at www.controlbyweb.com to learn more. Contact us at [1-435-750-5999](tel:1-435-750-5999) to discuss your application and get a quote.

Tank Cloud Compatible

As stated, the PT-500's low power consumption make it ideal for remote monitoring applications - especially when you're relying on solar or battery power. The Modbus version is compatible with our stand-alone devices, such as the X-404.

View level readings online for free using our Ethernet I/O devices. You can even enable data logging and control logic, such as alarms. Remotely keep an eye on your remote tanks and wells from your office or your smartphone.

Contact us today to discuss how remote monitoring with Tank Cloud can help you save time and money!

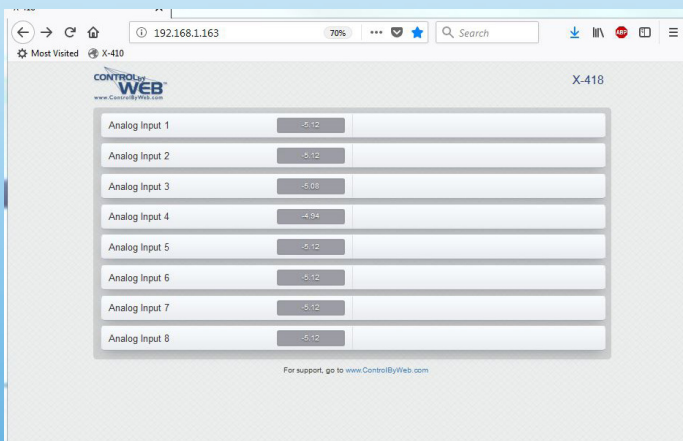

Applications

The versatility and reliability of the PT-500 makes it a great multi-purpose level sensor. It excels in water and hydrocarbon-based liquids where the density of the liquid is consistent. Here are typical applications where you'll find our PT-500 submersible pressure transducer:

- Lift Stations
- Retainer Ponds
- Well Level Monitoring
- Process Tanks
- Remote Level Monitoring
- Chemical Tanks
- Water Storage
- Oil Storage

Featured Configuration: PT-500 + MND Modbus Display

Our Modbus version expands the compatibility of PT-500. Specifically, it also makes it compatible with our Tank Cloud remote monitoring solution, and our various other Modbus products - including our MND display.

The MND is a powerful display that can be programmed as a master, a slave, or a snooper.

When combined in master mode with the PT-500 submersible pressure transmitter, the MND makes an accurate and easy-to-use "digital stick" level measurement tool. This setup is great for both a stationary installation or a mobile instrument.



This is made possible, largely, by the ability the MND has to power another sensor with its battery. The MND can both display the PT-500's reading and provide it power.

The wiring is also flexible. We can integrate the two by wiring them together in the factory, provide you with a connector on the display, or get you a wiring tee.

Contact us to learn more about using the MND and PT-500 together. We can help you get both configured correctly and ordered together.

Refer to the MND datasheet for more information.



PT-500 Specifications



Performance

- Accuracy (linearity, hysteresis, & repeatability): $\pm 0.250\%$ of span (BFSL) (1% for ≤ 1 psi)
- 1 Year Stability: 0-20,000 PSIS
- Temp Compensation Range: $0^\circ - 130^\circ\text{F}$ ($-17^\circ - 54^\circ\text{C}$)
- Temp Effects on Zero & Span: $\leq 0.025\%$ FS/ $^\circ\text{F}$ @ 70°

Connectivity

- Output:
4-20 mA
0-5, 0-10, 1-5, 1-10 VDC
mV/V

Environmental

- Maximum Depth:
Submersible up to 575 ft.

Certification

- 4-20 mA Output Only
CSA Intrinsically Safe:
Class 1, Division 1; Groups C & D
Ex ia IIB T4
Class 1, Zone 0, AEx ia IIB T4
Ambient: $-40 - 85^\circ\text{C}$
Single Seal

Electrical

- Supply Voltage:
4-20 mA, 0-5 VDC, 1-5 VDC: 9-28 VDC
0-10 VDC, 1-10 VDC: 14-28 VDC
mV/V: 10 VDC
- Current Draw:
4-20 mA: 3-30 mA
0-5 / 0-10 VDC, 1-5 / 1-10 VDC: 3 mA
- Electrical Connection:
Vented watertight cable w/free ends
Up to 200 lbs tensile strength
- Electrical Protection:
Lightning and Surge protection is built in.
Protected against reverse polarity, surge per IEC 61000-4-5

Physical

- Sensor Housing: 316L SS
- Enclosure: 316L SS
- Seal Housing: 316L SS
- Seal: Viton ETP-s
- Protective Nose Cone: Delrin
- Cables: PVC, Polyurethane, Hytrel

PT-500 Common Model Configurations

Waste Water Configurations

| Model Number | Model Description |
|--------------------------------------|--|
| PT-500C-5-PSI-G-L1-E0-P39-40-N0-B81 | 4-20mA Output, 0-5 PSI , Removable cage and 1-1/2" Tri-clover, 40 ft. PVC cable |
| PT-500C-10-PSI-G-L1-E0-P39-40-N0-B81 | 4-20mA Output, 0-10 PSI , Removable cage and 1-1/2" Tri-clover, 40 ft. PVC cable |
| PT-500C-15-PSI-G-L1-E0-P39-60-N0-B81 | 4-20mA Output, 0-15 PSI , Removable cage and 1-1/2" Tri-clover, 60 ft. PVC cable |
| PT-500C-20-PSI-G-L1-E0-P39-60-N0-B81 | 4-20mA Output, 0-20 PSI , Removable cage and 1-1/2" Tri-clover, 60 ft. PVC cable |

Clean Water Configurations

| Model Number | Model Description |
|-------------------------------------|---|
| PT-500C-5-PSI-G-L1-E0-P1-40-N0-B81 | 4-20mA Output, 0-5 PSI , 1/2" NPTM and removable nose cone, 40 ft. PVC cable |
| PT-500C-10-PSI-G-L1-E0-P1-40-N0-B81 | 4-20mA Output, 0-10 PSI , 1/2" NPTM and removable nose cone, 40 ft. PVC cable |
| PT-500C-15-PSI-G-L1-E0-P1-60-N0-B81 | 4-20mA Output, 0-15 PSI , 1/2" NPTM and removable nose cone, 60 ft. PVC cable |
| PT-500C-20-PSI-G-L1-E0-P1-60-N0-B81 | 4-20mA Output, 0-20 PSI , 1/2" NPTM and removable nose cone, 60 ft. PVC cable |

Model Configuration Options

Model Number: PT-500 _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ -B81
A B C D E F G H

A. Cable Type

- ▲ Polyurethane - Blue (with vent tube)
- A** PVC - Black (no vent tube - sealed unit)
- B** Hytrel .31" Ø - Black (with vent tube)
- C** PVC - Black (with vent tube)
- D** Hytrel .25" Ø - Black (with vent tube)

B. Pressure Range

- Specify range in desired unit of measure

_____ Max Water Depth
575 ft. (175.25 m), 250 psig

C. Standard Units of Measure

- | | | |
|---------------------------------------|---------------------------------------|--------------------------------------|
| <input type="checkbox"/> PSI | <input type="checkbox"/> FTH2O | <input type="checkbox"/> INWC |
| <input type="checkbox"/> INH2O | <input type="checkbox"/> MMH2O | <input type="checkbox"/> FWC |

D. Output

- L1▲** 4-20 mA, 2-wire

- L5** Modbus RTU, 4-wire RS-485*†
Pressure reading only

- L31** Modbus RTU, 4-wire RS-485 *†
Level calculations, tank volume

Note: *Indicates this option does not yet have CSA Approvals.

Note: †Indicates Field Adjustable Zero feature is not included.

E. NPTM

- E0▲** 1/2" NPTM fitting for conduit, with pigtail
- E5** Pigtail without conduit connection

F. Process Connection

- P1▲** 1/2" NPTM with removable plastic nose cone
- P5** 1/4" NPTF
- P37** Welded Cage (anti-snag 1 piece fitting)
- P38** 1-1/2" tri-clover with 3/4" diaphragm
- P39** Reusable Cage (includes P38 fitting)

G. Cable Length

- (specify length of cable needed in feet)

H. Accuracy

Greater than 1 PSI

- N0▲** ±0.25%
- N1** ±0.25% with NIST certification
- N2** ±0.1% with NIST certification

1 PSI and below

- N3** ±1%
- N4** ±1% with NIST certification

Note: ▲Indicates this option is standard.